

**ERICSSON**

<b>Favourites</b>	<b>Preferences</b>	<b>Text Search</b>	<b>Form Search</b>	<b>Data Analysis</b>	<b>Help</b>
<b>Support Call</b>	<b>Usage Report</b>	<b>Retrieve Search</b>	<b>S D I Search</b>	<b>Patentee Codes</b>	<b>Main Menu</b>

Full ☐Default List ☐

Change favourites list

<b>Clear Favourites</b>	<b>Add</b>	<b>Remove</b>	<b>Create New List</b>	<b>Email Documents</b>
<b>Previous</b>	<b>Next</b>	<b>Results</b>		

Document 5

PAN 1998-492066

**Derwent Title** Node restart notification system in communication network performs relay of restart notification to following small node or next large node according to direction of notification relay designated by received restart notification

**Patentee details** (FUIT ) FUJITSU LTD;( FUIT )

**Inventor names** No Data

**Abstract** JP-10215283 A; The system has a node number memory (101) which stored node number of almost in a communication network at predetermined numerical order. When the **restart** of an auto node is performed, then the following small node number and large node number next to the auto node number are searched from the node number memory. The **restart notification** containing the direction of descending order of **notification** relay and **restart** generation node number is produced. A **restart notification** start unit (102) transmits **restart notification** for the node having small node number and next large node number. The call is released when the **restart notification** forwarded from other nodes is received by the **restart** generation node. A **restart notification** relay unit (103) performs relay of **restart notification** to following small node or next large node according to direction of **notification** relay designated by received **restart notification**.


**Advantage** Shortens **restart notification** time. Improves communication network operation efficiency.


**Use Advantage** No Data

**Title Terms** std; node **restart notification** system communicate network performance relay **restart notification** follow node node accord direction **notification** relay designated receive **restart notification**

Patent: JP 10215283 A - Image No.: 1 [Hi Res Image]

本発明の原理図

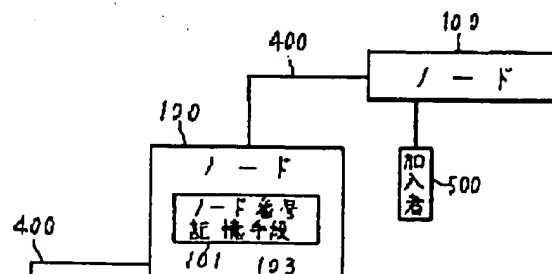

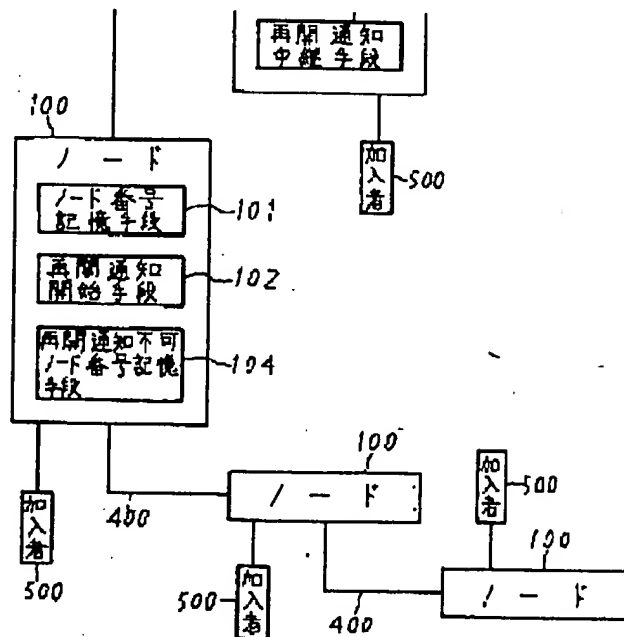

<u>Patent Family</u>	<u>Country &amp; No.</u>	<u>Date</u>	<u>Kind</u>	<u>Derwent Week</u>	<u>Patent Delivery</u>
	JP-10215283	11-Aug-1998	A	199842	<a href="#">Download</a>

<u>Priority details</u>	<u>Country &amp; No.</u>	<u>Date</u>
	JP-0016423	30-Jan-1997

<u>Application details</u>	<u>Country &amp; No.</u>	<u>Date</u>
	JP-0016423	30-Jan-1997

Earliest Priority 30-Jan-1997

IPC H04L-012/66

Derwent Class W01 Communications / Telephone and Data Transmission Systems.

Manual coding W01-A06G3 Digital information transmission / Network inter-connection

Citations No data available, please see the help files for more information

Countries JP

URL <http://patent-search.ericsson.se/search/bookmark.cgi?pan=1998-492066>

Update Week 199842

Document 5

PAN 1998-492066

Pre-selected as Favourite

[Previous](#)

[Next](#)

[Results](#)